



The BorderTS deflector is mounted centrally behind the spreader and is activated hydraulically.



When activated, the BorderTS deflector on the ZA-TS is swivelled into the spread fan from above. The special baffle plate construction and infinitely adjustable guide plate gently guide the granules to the ground.

Baffle plate construction with integrated software


At larger working widths, the fertiliser must be accelerated considerably more in order to achieve a good area of overlap with the spread fan from the first tramline. Due to the high energy of the granules, the evenness of distribution behind the tractor provided by conventional systems is often unsatisfactory. The BorderTS deflector features a special baffle plate construction which includes a guide plate, the angle of which can be adjusted. The baffles first remove the energy from the granules, which are then gently guided to the ground by the guide plate. The guide plate is infinitely adjustable for optimal application up to the field boundary. In addition, a sensor detects the working position. When the deflector is in use, the spread rate and the delivery point of the fertiliser onto the spreading disc are automatically adjusted to ensure the best possible lateral distribution in combination with the disc-integrated AutoTS border spreading system.

It goes without saying that the application rate can be manually overridden at any time in response to special situations.

- ❗ "Checking with the mats at the field boundary showed the effectiveness of the deflector in our application. At the same time, the fertiliser rate for the field was applied right up to the boundary after driving in the tramline and round the outside – excellent."

(profi – "Border work" – 04/2022)

Illustration of the combined use of BorderTS and AutoTS

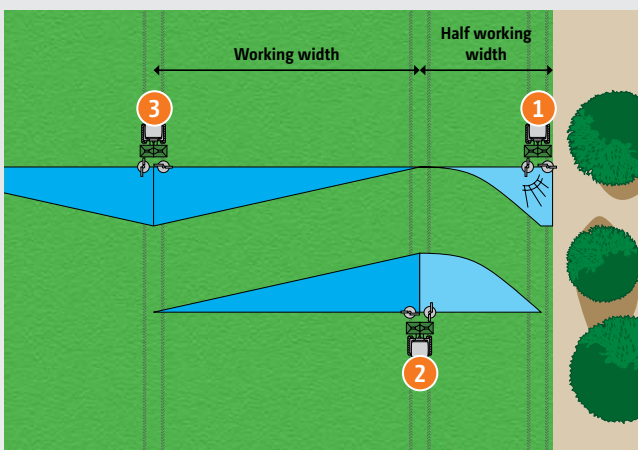

1. Fertiliser is spread from the edge of the field into the crop by the BorderTS deflector, with automatic reduction of the target rate to 50%. The shutter nearest the field boundary is left closed.
2. AutoTS spreads at 50% from the first tramline to the boundary side in order to achieve the target rate across the total field boundary area. Normal spreading to the field side with 100 % of the target rate.
3. In the subsequent tramlines, normal spreading is resumed with 100% of the target rate to both sides.

Proven precision!

Innovation Farm field trial

INNO
VATION
FARM 

FARMING FOR FUTURE



- ✔ Large-scale field trials by Innovation Farm in Austria compared four border spreading systems under practical conditions.

Additional revenue per hectare of cropped area and per year with the use of the different border spreading systems at a width of 36 m (top agrar 07/2022, Source: Innovation Farm)

average field size	2 ha	4 ha	12 ha
Limiter	€ 52.28	€ 36.96	€ 21.35
Hydro	€ 56.04	€ 39.61	€ 22.89
AutoTS	€ 117.02	€ 82.71	€ 47.79
BorderTS	€ 121.22	€ 85.68	€ 49.50

Field trials prove the best border spreading results

The aim of the field trial was to demonstrate the fact that border spreading systems provide not only ecological benefits, but also that they have a great influence on the potential yield in the field boundary area.


Precise technology is required to spread the full rate of fertiliser right up to the field boundary, even at the larger working widths, as well as avoiding any fertiliser losses outside the field boundary.

AutoTS and BorderTS fulfil these requirements. This means that higher yields can be achieved, even at the field boundary.

Core messages of the trial

- ❗ "A wider working width or smaller field sizes increases the level of return on a boundary spreading system."
- ❗ "The AutoTS and BorderTS spread patterns show a relatively even spread rate all the way up to the boundary where the rate then drops steeply."
- ❗ "Any underdosage was clearly reduced by using AutoTS and BorderTS, which translates into higher yields."
- ❗ "This means that using both AutoTS and BorderTS is beneficial at the larger working widths."

(top agrar – "Precision goes boundary spreading" – 07/2022)

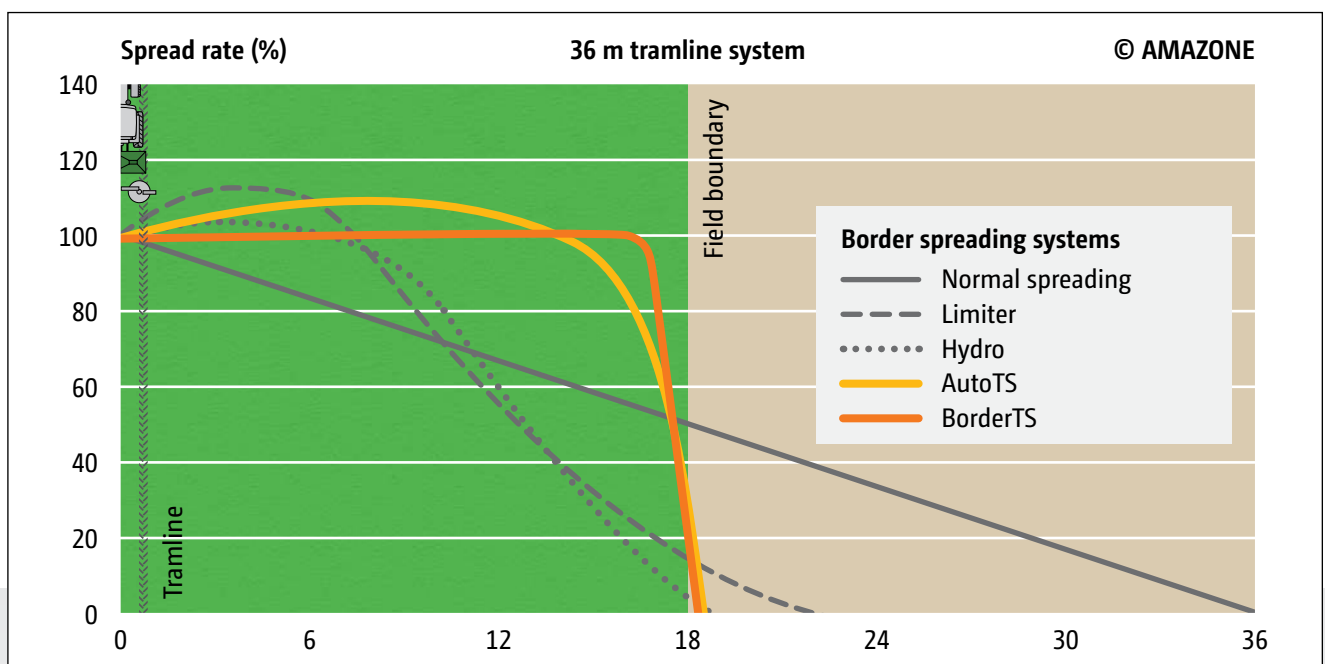

The illustration shows the border spreading procedure, whereby ideally no fertiliser should be spread beyond the field boundary.


- ❗ "... This was different on AutoTS and BorderTS which continued to apply a very even spread."

(top agrar – "Precision goes boundary spreading" – 07/2022)


Exclusive!

HeadlandControl


Optimum lateral distribution on the headland

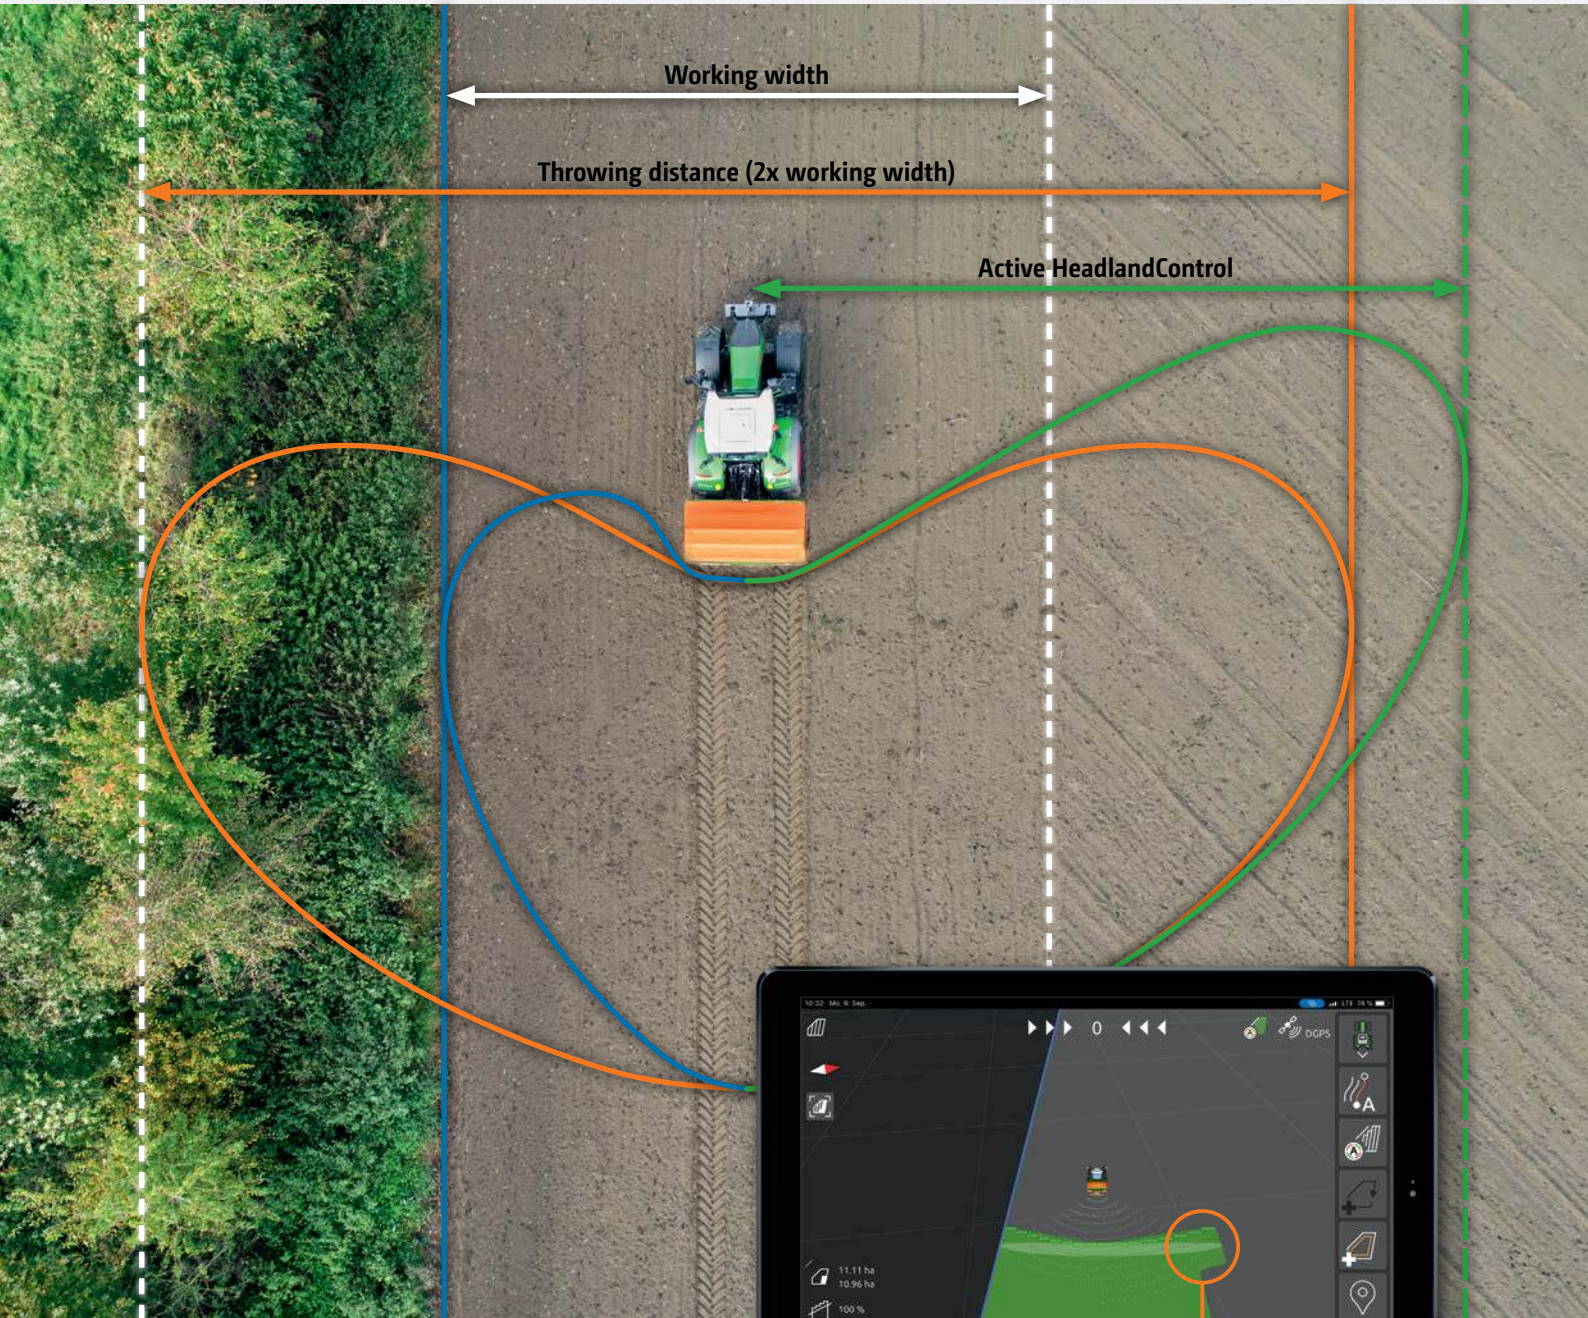

- HeadlandControl
- Normal spreading
- Border spreading

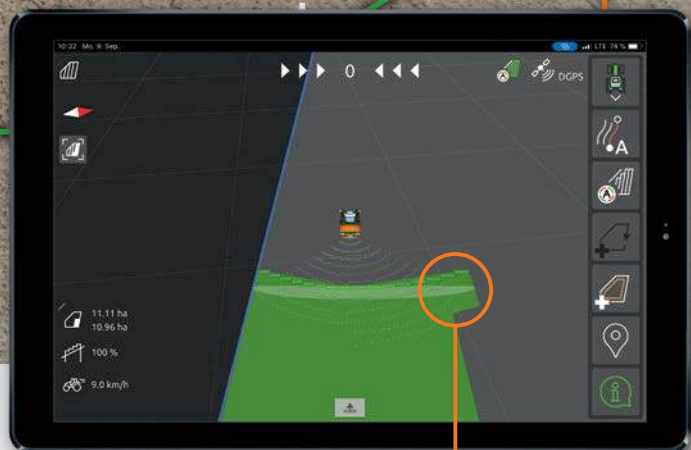

HeadlandControl provides an increase in the working width towards the inside of the field on the headland.

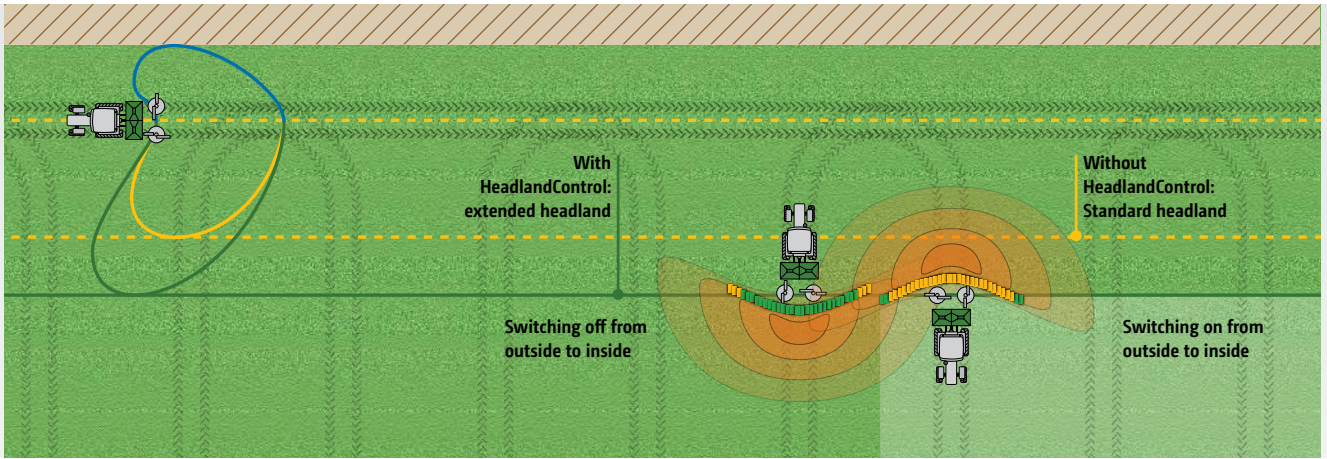

Perfected headland coverage thanks to HeadlandControl and the new part-width section control

The problem: over- and under-fertilisation on the headland

Fertiliser spreaders have a high throwing distance behind the machine. In practice, the switch-off points are usually only achieved when the tractor is turning on the headland. The arc of spread behind the tractor and round to the side creates areas that are either over- or under-fertilised.

Switch-off time on the headland: Without HeadlandControl

1. Spreader switches off too late and is already turning
2. Tractor would have to drive beyond the headland tramline

Result: over- and under-fertilised zones are created



The solution: HeadlandControl

When HeadlandControl is activated, the throwing width and spread rate are increased on the field side, so that the switch-off point is moved towards the inside of the field. Furthermore, the new part-width section control, which is now adapted to the shape of the spread fan, causes the part-width sections to be switched off from the outside to the inside when entering the headland. Over- and under-fertilised zones on the headland are subsequently avoided.

With HeadlandControl

1. HeadlandControl means that the spreader continues to apply fertiliser to the crop when it is on the headland
2. The tractor can follow the wheel tracks of the crop protection sprayer

Result: uniform crops across the full headland

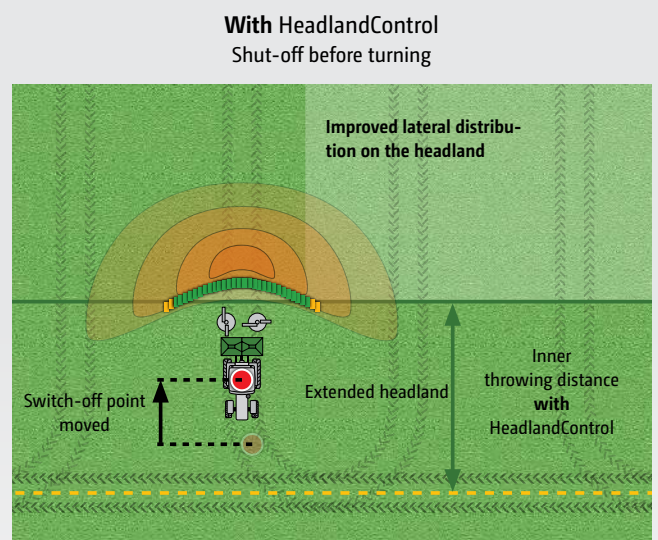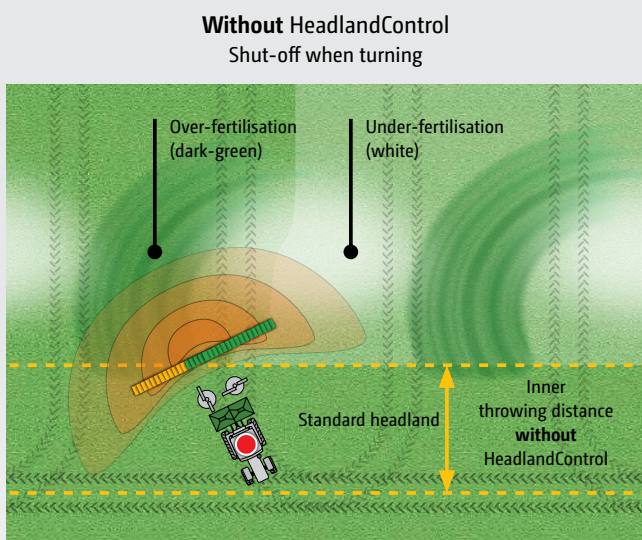

"More than ISOBUS" functions from AMAZONE extend beyond the ISOBUS standards. Because of this, HeadlandControl, amongst other things, does not function on all ISOBUS terminals.

Exclusive!


WindControl

Don't give wind a chance!




AMAZONE WindControl ensures an optimum lateral distribution even in crosswinds

- ✔ WindControl traffic light system
 - Green: Unlimited spreading
 - Yellow: Increased control in border areas
 - Red: Stop spreading!

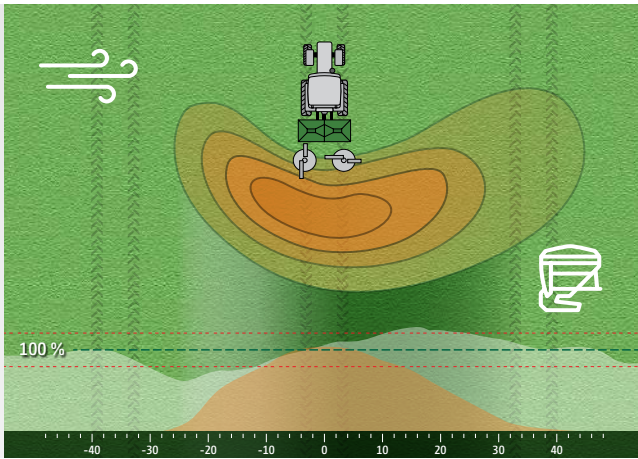

Without WindControl: Crosswinds affect the spread pattern and change the lateral distribution

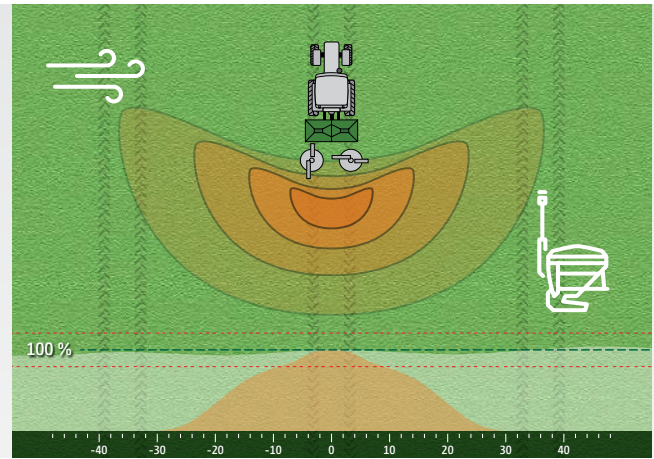

With WindControl: WindControl counteracts the effect of a crosswind ensuring an optimum spread pattern at all times

Optimum lateral distribution

The wind is always blowing somewhere in the world and this represents a major challenge in maintaining an even fertiliser spread pattern. The influence of wind on the spread pattern can be constantly monitored and automatically compensated for with the AMAZONE WindControl system (according to Prof. Dr. Karl Wild of the University of Applied Sciences, Dresden).

Mounted on the machine, a high frequency measuring wind sensor, registers both the wind speed and also the wind direction. According to this data, the job computer then calculates new settings for the delivery system and the spreading disc speed. In a cross wind, the disc speed is increased on the side into the wind and the delivery system is rotated outwards. At the same time, the speed of the downwind side is reduced and the delivery system rotated inwards.

With the aid of WindControl, larger time windows are created for spreading even where there is an influence of wind. Apart from all the important fertiliser spreader parameters, the user additionally always has, in view, the real-time direction of the wind, the force of wind and if the wind is gusting. In addition, WindControl issues an automatic warning to the driver in the event of strong winds, when the system is no longer able to compensate for the effects of the wind or when gusts of wind change too frequently.


The benefits

- ✔ Higher output through longer windows of use
- ✔ Increased yield through optimised lateral distribution
- ✔ Operational safety via the automatic warning system


WindControl in practice

Key data and information

- Field size 70 ha
- Wind speeds of up to 27 km/h
- WindControl improves the lateral distribution across 70 % of the area*



INFORMATION ON THE FIELD TRIAL
www.amazone.net/windcontrol

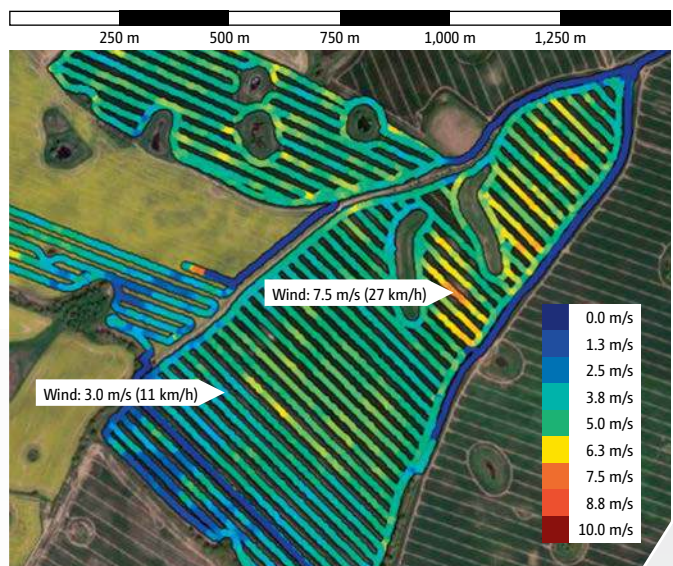


ArgusTwin

The spreader's eyes – they see what you don't see!



Argus

❗ "ArgusTwin optimised the lateral distribution within seconds."
("profi" – Test report Amazone ArgusTwin · 01/2016)

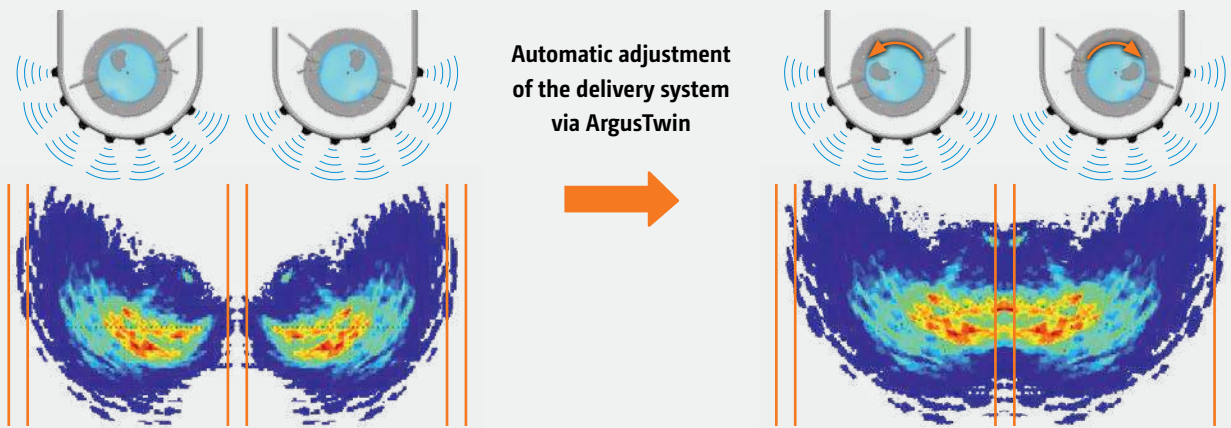

The problems in practice – poor lateral distribution, for instance, due to a change in fertiliser properties

Perfect lateral distribution enables uniform crops, even with varying fertiliser quality and properties

Automatic adjustment to the optimum lateral distribution

Via the constantly working on-line monitoring and readjustment of the delivery system, the ArgusTwin system ensures an optimum lateral distribution of the fertiliser. This leads to a more effective fertiliser use and forms the basis for optimum crop management.

The Argus system, which checks the spread fan and automatically regulates the lateral distribution, is based on radar technology that is independent of dust and pollution and thus provides reliable results in practice. ArgusTwin constantly monitors, via radar sensors mounted on both the sides of the spreader, the left and right hand spread fans simultaneously and readjusts the electric delivery system independently of each other if necessary.

Automatic delivery system adjustment

Via the ISOBUS terminal, the application rate, and any further relevant data relating to the fertiliser to be spread, are entered from the setting chart. For the Argus system, the spreading chart has been updated to include the throwing angle that gives the optimum lateral distribution. Utilising this value, ArgusTwin constantly checks whether the predetermined direction of throw for that fertiliser is in fact being maintained by the spreading discs. When the actual throwing width deviates from the "desired" throwing width

due to inconsistencies within the fertiliser, worn spreading vanes, working across slopes or during starting and stopping procedures, the spreader readjusts, on its own, the setting for the delivery system – and that of each side individually. The only pre-condition for its use is the electric delivery system adjustment.

The benefits

- ✔ Constant on-line monitoring of both spread fans
- ✔ Maintains an optimum lateral distribution of the fertiliser even with:
 - variable fertiliser quality
 - environmental influences, such as moisture and dew
 - Fertiliser coating on the spreading discs
- ✔ Automatic slope compensation of the spread pattern
- ✔ Positioned protected directly above the spreading discs



REACTION FROM THE END USERS!
Find out more

Optional equipment

Perfect down to the last detail



SafetySet – integrated as standard

The SafetySet, which is fitted as standard equipment ensures improved safety. The outer guard tube fulfils the accident prevention regulations. Large marker boards to the rear and the LED road lighting kit ensure more recognisability in road traffic.

Holder for the GPS receiver on the fertiliser spreader

The holder, including a 12 m GPS connecting cable, serves to mount a GPS receiver on the fertiliser spreader instead of on the tractor. The GPS receiver can remain on the spreader if the tractor is changed frequently, such as with machine cooperatives. In use, the GPS receiver is always located clearly above the fertiliser spreader.

Roll-over cover

The roll-over hopper cover, either manually operated or hydraulically-actuated from the tractor, is available for all S extensions and L extensions. It safely covers the whole of the hopper access area and ensures, when compactly rolled up, the maximum filling opening. The roll-over hopper cover can also be combined with the bolt-on S 600 and L 800 extensions.

Swivel hopper cover

As a cost-effective alternative to the roll-over hopper cover, the swivel hopper cover, with large sight windows can be chosen but only for the S extensions.



Swivel hopper cover, in its maintenance position for a simpler internal cleaning

! "The roll-over cover is good: it closes off neatly, keeps the water out during a shower and does not interfere with the filling operation when open/rolled up."

(dlz agrar magazine – Long term test ZA-TS "Wide throwing master" - 01/2016)



❗ "The robust (and steered at the front) parking rollers with brakes are swivelled in or out with a bold kick. There is no better way."

(profi – Practice test "Four fertiliser spreaders in comparison" - 01/2016)

Swivel rolling and parking device

The swivel rolling and parking device facilitates the easy mounting on and off the tractor and manoeuvring in the yard. The castor wheels are quickly folded in and out and optimally protected from dirt. They are permanently mounted on the spreader – so no need to search for them between one location and another.


Ladders that ensure safe access

For optimum access to the hopper from outside, even on the narrow extensions, a ladder is available which can be fitted to the left and/or right hand side. For the wide L extensions though, ladders are provided to both sides as standard.



❗ "Amazone sets the standard, even with the ladder: The rungs (stainless steel) are well integrated on both sides and do not protrude."

(profi – Practice test "Four fertiliser spreaders in comparison" - 01/2016)

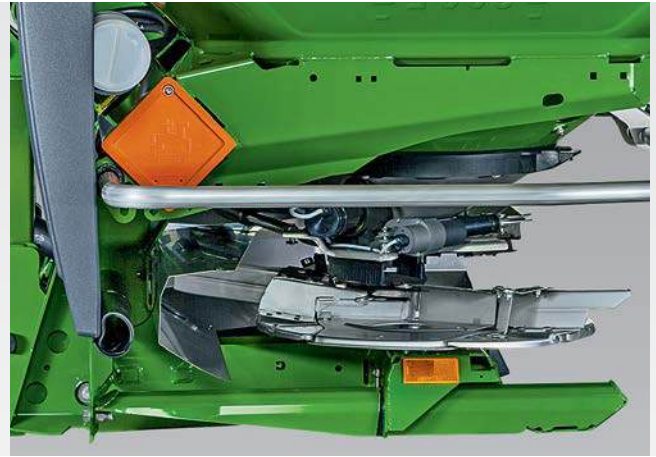

✔ Parking device with integrated stands

Parking device options

As an alternative to the swivel rolling and parking device, there is also a cheaper parking stand with integrated skid available.

Camera system for the ZA-TS – Safety first!

The optionally available camera system mainly serves for safety when manoeuvring. The high resolution, antiglare monitor is backlit and can also display two cameras at once. The coupling to an ISOBUS terminal with an analogue video input is also possible.



✔ With the analogue video input on AmaTron 4, the picture from the camera can also be displayed alternatively.

Let there be light

Multiple benefit of the working lights



The lighting for spreading unit is integrated securely in the lighting carrier.

Spread fan, spreading unit and hopper internal lighting

An optional work light kit is available as a supplement to the standard LED lighting for the ZA-TS mounted spreader.

LED work lights are mounted in the hopper above the spreading discs and at the sides of the spreader. This ensures that the user has an overview of the fill level in the hopper at night, and has adequate lighting for changing the spreading discs and for setting the telescopic blades on the spreading vanes.

The work lights are fully integrated in the software of the fertiliser spreader and can therefore be operated remotely from the tractor cab via the ISOBUS terminal.

The two side-mounted LED work lights provide perfect illumination of the spread fan to the left and right in the dark.

Filling aid

Operators will particularly love the filling aid provided by the work lights and the Profis weighing system. Initial flashing followed by the constant lighting up of the work lights signals that the fill level has been reached. A second person, or the frequent dismantling for checking, are no longer necessary.



Lighting for the inside of the hopper



The pre-set load capacity is achieved when the work lights comes on continuously.

Front-Rear duo

A new level of precision



A road lighting kit is available for safe road use when in transport with the front-mounted spreader.

Two into one goes

For customers who intend to accurately spread two different mineral fertilisers in just one pass, AMAZONE offers the unique possibility of a front-mounted spreader. Other than when utilising blended fertilisers in one fertiliser spreader, this option allows the optimal setting of each spreader according to the properties of the relevant fertiliser. In this way, the perfect lateral distribution for both fertilisers is achieved. Also spreading with two different application maps is possible.

The benefits of front-mounting

- ✔ Possibility to accurately spread two different types of fertiliser in just one pass
- ✔ More capacity from the additional hopper capacity yet with the benefits of a mounted machine – manoeuvrable and speedy
- ❗ "The spreader duo shows its strengths in its precision."
- ❗ "The combination is manoeuvrable, efficient and improves the weight distribution on the front and rear axle."
(agrarheute magazine– test report with the front mounted spreader · 09/2018)

Comfortable and reliable

To enable operation of a "reversed" fertiliser spreader on the front of the tractor, an intelligent software package is utilised which reliably mirrors the spreading function and required working without any rethinking. In this way, even normal, side, border and water course spreading can be

actuated on the correct side without any problems. Even the optimum switching points for the automatic on/off switching on the headland are mirrored.



- ✔ Precise spreading of two different fertiliser types

ZA-TS model overview

Always the right choice:



With the tractor ISOBUS base equipment, all the benefits of the ZA-TS can be utilised even on older tractors

One spreader – so many possibilities

Decide for yourself!

	<i>ZA-TS Tronic</i>	<i>ZA-TS Profis Tronic</i>	<i>ZA-TS Hydro</i>	<i>ZA-TS Profis Hydro</i>
Basic machine				
Electric shutter actuation	●	●	●	●
Electric agitator	●	●	●	●
Electric delivery system	○	○	○	○
Forward speed-dependent spread rate regulation	●	●	●	●
Low level sensors	○	○	○	○
Border spreading device				
Border spreading AutoTS	○	○	○	○
Border spreading with BorderTS <small>(manual/electric delivery system)</small>	– / ○	– / ○	– / ○	– / ○
Bed spreading via bed spreading deflector	○	○	○	○
On-line spread rate calibration				
Profis weighing system	–	●	–	●
ProfisPro weighing system + torque measuring	–	○	–	○
Tilt sensors	–	○	–	○
Optimisation of the lateral distribution				
ArgusTwin <small>(manual/electric delivery system)</small>	– / ○	– / ○	– / ○	– / ○
WindControl <small>(manual/electric delivery system)</small>	–	–	– / ○	– / ○
HeadlandControl <small>(manual/electric delivery system)</small>	– / ●	– / ●	– / ●	– / ●
Part-width section control				
Incorporating the delivery system adjustment <small>(manual/electric delivery system)</small>	– / ●	– / ●	– / ●	– / ●
Incorporation of spreading disc speed	–	–	●	●
Max. number of part-width sections <small>(manual/electric delivery system)</small>	8 / 16	8 / 16	128 / 128	128 / 128
Mode of operation				
Terminal	ISOBUS	ISOBUS	ISOBUS	ISOBUS
Automatic documentation	●	●	●	●

● Standard ○ Option – not available

MEMBER OF



ISOBUS as the basis for intelligent communication

One language, many benefits!

Each ISOBUS-enabled machine from AMAZONE comes with the latest technology and almost unlimited possibilities. It makes no difference whether you use an operator terminal from AMAZONE or an ISOBUS terminal fitted directly in the tractor. ISOBUS is an internationally recognised standard for communication between the operator terminal, tractors and connected implements on the one hand and Farm Management Information Systems on the other.

Operation via a wide-range of ISOBUS terminals

Which means that ISOBUS enables you to take control of all your ISOBUS compatible equipment. You only have to connect the machine to the respective ISOBUS terminal and the usual operator interface appears on the monitor in your tractor cab.

Benefits of ISOBUS at a glance:

- ✔ This worldwide standard provides a uniform interface and data exchange format that ensures compatibility even with third party manufacturers
- ✔ Plug and Play between machine, tractor and additional ISOBUS implements





Perfectly developed machine operation from AMAZONE

AMAZONE machinery and operator terminals offer a range of functions which are very easy and safe to operate:

- ✔ Highest compatibility and function flexibility of your ISOBUS equipment
- ✔ No additional modules on the machine side. All ISOBUS machines from AMAZONE come ready-equipped with the necessary ISOBUS functions as standard
- ✔ Practice-oriented machine software and logical menu structure
- ✔ MiniView display with all AMAZONE terminals and additional ISOBUS terminals. See, for instance, the machine data in the map view
- ✔ Possibility of operating the machine via the tractor terminal or a twin terminal solution
- ✔ Flexible assignment of the map and machine view between the tractor terminal and the operator terminal
- ✔ Unique operating concept. Freely configurable displays and individual user interfaces for each driver
- ✔ Functions such as HeadlandControl and parabolic part-width section control
- ✔ Integrated TaskController data logger function




Clearly structured AMAZONE machine operation

Advantages of the AMAZONE machine software:

- ✔ User-oriented and intuitive
- ✔ Tailored to the machine
- ✔ Function scope above and beyond the ISOBUS standard

Automatic GPS-Switch part-area shut-off with Section Control

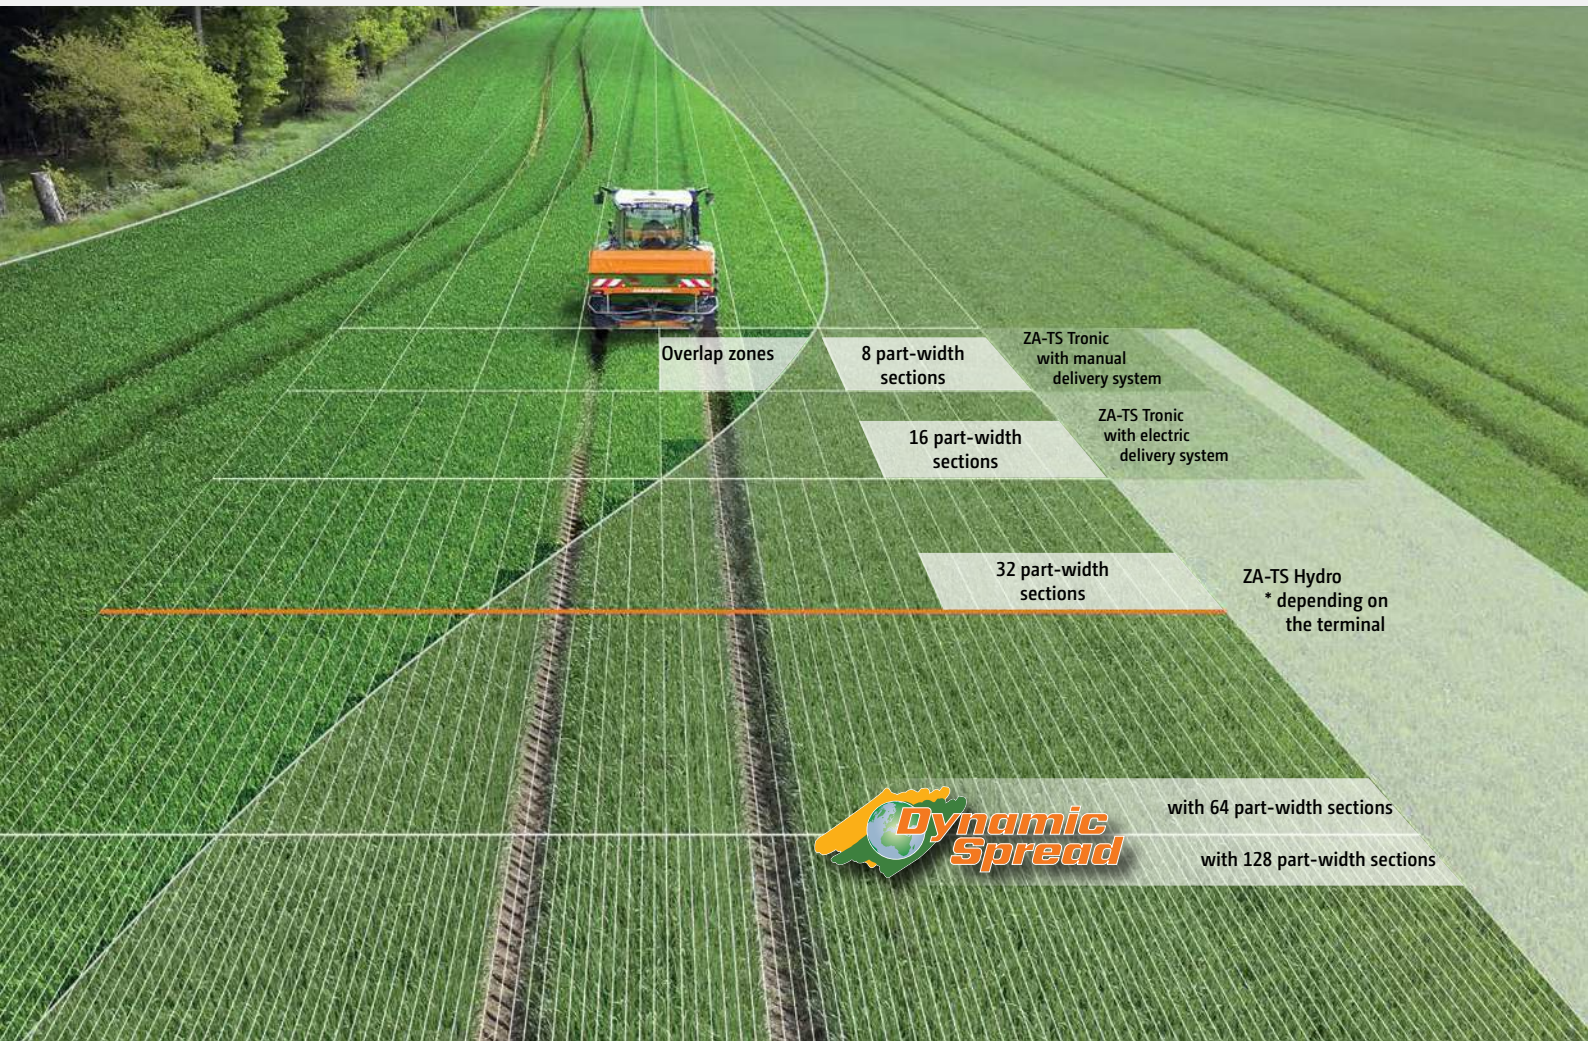

✔ With DynamicSpread, individual outlying part-width sections can also be controlled.

More precision, more efficiency!

In view of the very large working widths used now, the matching of the spread patterns is very important. Thanks to the electric delivery system adjustment on the TS spreading system, it is able to react precisely and sensitively in these cases. So even outer part-width sections can be easily controlled. In addition, due to the individual speed adjustment of the left and right hand side discs, the spreading width can be reduced from the far outside

to the centre, so that, even at large working widths, long and shallow-shaped wedges and short work are optimally spread. This means part-width section control. At the simplest level of specification, 8 part-width sections can be easily actuated manually (via the operator terminal). When utilising a relevant Section Control licence on the terminal, a part-width section control of up to a maximum of 128 part width sections can be utilised.

Part-width section control for ISOBUS fertiliser spreaders	ZA-TS Tronic Manual delivery system adjustment	ZA-TS Tronic Electric delivery system adjustment	ZA-TS Hydro Manual delivery system adjustment	ZA-TS Hydro Electric delivery system adjustment
Spread rate regulation	X	X	X	X
Setting the delivery system		X		X
Matching the spreading disc speed			X	X
Number of part-width sections • Manual mode at the press of a button • Automatic mode via SectionControl/GPS-Switch	8 In manual and automatic mode	8 In manual mode 16 In automatic mode	8 In manual mode up to 128 In automatic mode	8 In manual mode up to 128 In automatic mode
Possible working widths	15–54 m	15–54 m	15–54 m	15–54 m

GPS-Switch

If the operating terminal facilitates Section Control, such as GPS-Switch part-width section control from AMAZONE, the part-width sections are activated completely automatically and in relation to the GPS position. Once a field has been created, and then in automatic mode, the driver can concentrate fully on the operation of the towing vehicle, since the part-width sections are switched automatically in wedge shaped fields and on headlands.

Benefits of automatic part-width section control:

- ✔ Stress relief on the driver
- ✔ Increase in precision especially at night or at higher speeds
- ✔ Fewer overlaps and gaps
- ✔ Saving on input costs
- ✔ Less crop damage and less environmental pollution
- ❗ "With Section Control, the ISOBUS terminal takes a lot of pressure away from the driver."
("dlz agrar magazine" – test report ZA-TS fertiliser spreader · 02/2017)


With GPS-Switch, AMAZONE offers GPS-based, fully automatic, part-width section control for all AMAZONE operator terminals and ISOBUS-compatible fertiliser spreaders, crop protection sprayers or seed drills.

GPS-Switch basic


- ✔ Automatic part-width section control for up to 16 part-width sections
- ✔ Creation of a virtual headland
- ✔ Parabolic part-width section control in the form of the spread fan
- ✔ Optional with AmaTron 4

GPS-Switch pro (as an add-on to GPS-Switch basic)

- ✔ Automatic part-width section control for spreaders with hydraulic spreading disc drive
- ✔ Marking of obstacles (e.g. water holes, pylons)
- ✔ Auto-zoom when approaching the headland

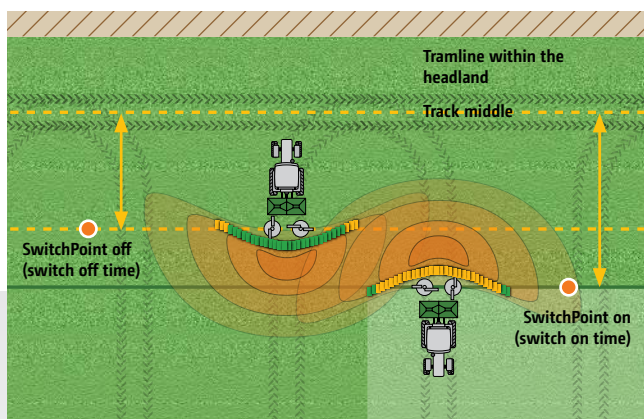

- ✔ When utilising GPS-Switch, SwitchPoint allows the on/off switching points to be re-adjusted depending on the fertiliser type and the working width.

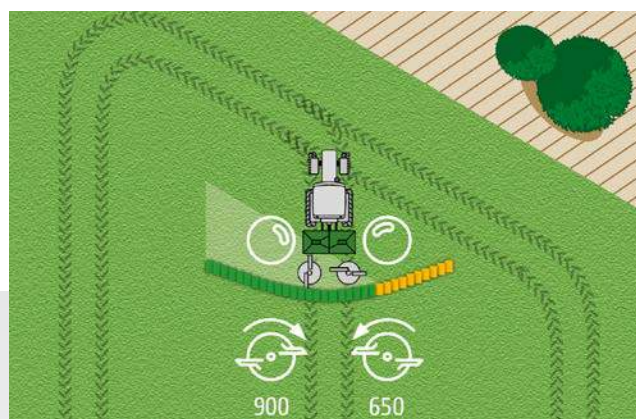

- ✔ Optimum part-width section control with adjustment of the delivery system, adaptation of the spreading disc speed (Hydro) and spread rate regulation.

Workday made easy –

Make the most of the possibilities!

GPS-Maps&Doc

All standard ISOBUS terminals from AMAZONE can collect and save machine and site-specific data using Task Controller. Part-area, site-specific operation via application maps in either Shape file or ISO-XML formats is also possible.

- ✔ Easy creation, loading and processing of jobs
- ✔ Start a new task straight away and decide later whether the data is to be saved or not
- ✔ Import and export jobs in ISO-XML format
- ✔ Job summary via PDF export
- ✔ Intuitive system for processing application maps in either Shape file format and ISO-XML format
- ✔ Automatic part-area, site specific regulation of the application rate
- ✔ Indication of inactive field boundaries and automatic field detection when approaching the vicinity
- ✔ Optimum crop management via needs-based application
- ✔ Available as standard with AmaTron 4

GPS-Track

The GPS-Track parallel guidance greatly helps with orientation in the field, especially on grassland or in areas without tramlines.

- ✔ With a virtual light bar in the status bar
- ✔ Automatic tramline control via GPS for seed drills
- ✔ Various track modes such as A-B lines or contour following
- ✔ Optional with AmaTron 4

AmaCam

Software licence for displaying a camera image on AmaTron 4.

- ✔ Automatic display of the camera image on AmaTron 4 when reversing



Display of the application map in AmaTron 4



Display of the camera image in AmaTron 4

AmaTron 4

Manager 4 all



Simple and convenient operation as intuitive as your tablet

Why not handle a terminal as intuitively as a tablet or a smartphone? With this in mind, AMAZONE has developed the operator-friendly AmaTron 4 which offers a noticeably smoother operational procedure, especially when it comes to job management. The AmaTron 4, with its 8" multi-touch colour display meets the highest expectations and offers maximum user-friendliness. A swipe of the finger or use of the App carousel allows quick changes between applications and the simple and clearly structured operating menu. A useful MiniView, a freely configurable status bar as well as a virtual light bar make the use of the AmaTron 4 particularly clear and convenient.

Benefits of AmaTron 4:

- ✔ Automatic full screen mode when not being touched
- ✔ Automatic display of the touch buttons via a proximity sensor
- ✔ Practical MiniView concept
- ✔ Actuation via the multi-touch colour display or soft keys
- ✔ Particularly intuitive and user-friendly
- ✔ Field-related documentation
- ✔ Practice-oriented and intelligent menu navigation
- ✔ Practical quick-start menu with import and export of job data, help windows, day/night mode and the AUX-N assignment
- ✔ One camera input and automatic reversing detection
- ✔ Free trial period for all chargeable licences
- ✔ AmaTron Connect – for the optional entry into the digital age

Equipped as standard with:

GPS-Maps&Doc



AmaPilot+ – everything in the one hand!

Thanks to the AUX-N feature, you can operate multiple functions on the machine via AmaPilot+ or any other ISO-BUS multi-function joysticks.

Advantages of AmaPilot+:

- ✔ Nearly every function is controlled directly via the 3 levels
- ✔ Adjustable palm rest
- ✔ Freely programmable, individual key layout

AmaTron Connect

New ways of comfortable networked operation

With AmaTron Connect, AMAZONE provides a digital interface to a smartphone or tablet. The mobile device and AmaTron 4 are simply connected as a hotspot. AmaTron Connect enables use of the AmaTron Twin App as well as data exchange via agrirouter and the myAmaRouter App.



Everything in view at all times with the AmaTron Twin App and the holder kit for a tablet for rigid mounting on the AmaTron 4

AmaTron Twin App

Clear display enhancement

The AmaTron Twin App offers the driver even more comfort during work, as any GPS functions in the map view can also be operated via a mobile device, e.g. a tablet, in parallel with machine operation on the AmaTron 4.

Advantages of the AmaTron Twin display enhancement:

- ✔ Use of an existing mobile device
- ✔ Greater clarity – all applications in sight
- ✔ Comfortable control of the GPS functions in the map view, in parallel, via the mobile device
- ✔ Clear, authentic representation of the working machine and its part-width sections

Now download the free App and try the DEMO in the App.



Alternative map views with AmaTron Twin – clear display of the machine and its part-width sections, as well as buttons on the right hand side of the mobile device.

agrirouter –

the independent data exchange platform for agriculture



Watch the video for more details


Secure data exchange

agrirouter is an independent data exchange platform for farmers and contractors. It enables simple and cross-manufacturer data exchange between machines and agricultural software applications, thereby reducing administration. The user retains full control over the data at all times.

myAmaRouter App

For the on-line transfer of data between AmaTron 4 and agrirouter

The myAmaRouter App enables data to be exchanged between the AmaTron 4 ISOBUS operator terminal and the agrirouter manufacturer-independent data exchange platform. If an AMAZONE machine is to be used to carry out a task with job data (e.g. application maps), the data can be easily transmitted from a Farm Management Information System (FMIS) to AmaTron 4 via agrirouter and the myAmaRouter App. After the work has been completed, the job can be sent back and is available for documentation in an agricultural software application.

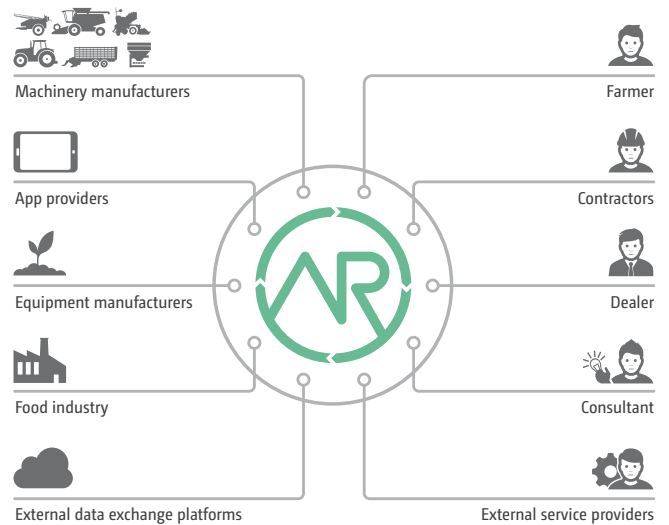

The manufacturer-independent agrirouter enables secure and uncomplicated data exchange.

Benefits of agrirouter:

- ✔ Simple data exchange between the AmaTron 4 ISOBUS operator terminal and the manufacturer-independent agrirouter data exchange platform
- ✔ Easy and rapid transfer of job and task data without the need for a USB stick
- ✔ More flexibility in data exchange and documentation

Uncomplicated data transfer. Transparent and secure!



ZA-TS 3200 ProfisPro Hydro

Exclusive!

GPS ScenarioControl


Terminal software for the automation of complex switching processes



GPS ScenarioControl can be used in conjunction with the AmaTron 4 ISOBUS operator terminal and the AmaTron Twin App.

- ! "GPS-ScenarioControl from AMAZONE helps to prevent errors in the selection of the border spreading mode and any unnecessary wheel tracks."

("profi" – Practice test "Pushing boundaries with the App" · 01/2022)

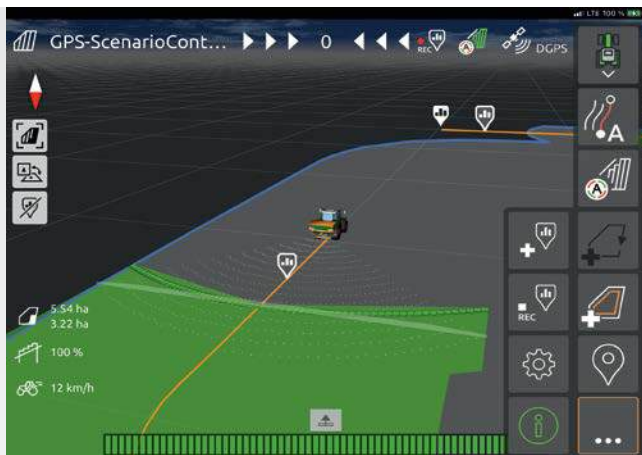

GPS ScenarioControl view on the AmaTron Twin App



Field with complete route planning and saved, geo-referenced scenarios

Support for needs-based fertilisation

When applying fertiliser, drivers have to juggle various tasks. Firstly, they need to ensure optimal lateral distribution of the material to be spread, as well as maintaining the desired application rate of the fertiliser. Secondly, they must ensure that the most appropriate border spreading mode is used alongside ditches, footpaths or field boundaries, to guarantee legally compliant and precise fertilisation. This can lead to operator errors, especially when changing drivers, as the right border spreading procedure is not activated or deactivated in the right place. Lack of driver knowledge can also lead to non-compliance when applying fertilisers.

Record and store the right driving strategy

When crossing the field for the first time with the fertiliser spreader, all the switching points, driving route and driving direction can be automatically plotted by an experienced driver using GPS ScenarioControl, by pushing the record button. The switching points are clearly marked on the map and the driving direction is visualised with arrows. GPS ScenarioControl is integrated in the AmaTron 4 ISOBUS operator terminal and can be viewed and operated via the AmaTron Twin display extension.

Automation of complex switching processes and reduction of driver workload

In the following application, the driver only needs to activate the previously plotted scenario and the fertiliser spreader will automatically perform the saved switching processes. GPS ScenarioControl enables the precise, resource-efficient use of fertiliser, as the various spreading procedures are performed in exactly the right places. This ensures that any subsequent applications by other drivers are legally compliant. In addition, drivers can use the pre-plotted, optimised field route as a guide.

The advantages at a glance:

- ✔ Always the same switching processes with different fertiliser applications
 - Prevention of operator error
 - Legally compliant and resource-efficient fertiliser application guaranteed
 - Correct application in poor visibility, e.g. darkness or fog
- ✔ No flattening of crops because routes in the field are always optimised
 - Supports inexperienced drivers

❗ "As a result, the tool provides farm managers with the assurance that their drivers apply the fertiliser beside ditches and paths within the law and elsewhere are optimised for yield. This is particularly interesting when the drivers frequently change or when the boss wants to entrust the fertilisation to, for instance, his trainees."

("prof" – Practice test "Pushing boundaries with the App" · 01/2022)

Spreader Application Center

Exemplary – for more than 25 years

The settings are crucial!

AMAZONE is providing even better customer service with the Spreader Application Centre. In addition to the already well-established fertiliser laboratory and spreading hall, the Spreader Application Centre now also includes the areas of "Test and Training", "Data management" and the associated "Knowledge transfer".

The last two areas are accompanied by a restructuring to address the increasing globalisation and digitalisation of agriculture. The aim of the Spreader Application Centre is to offer to the customer an even better service with regard to fertiliser application.




Fertiliser laboratory



Spreading hall



Test and Training

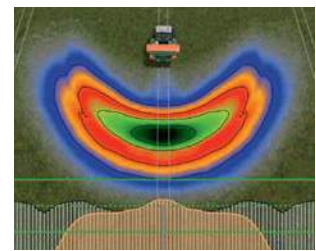

Data management and knowledge transfer

Only when properly spread is your fertiliser worth its weight in gold

The AMAZONE FertiliserService closely cooperates with well-known manufacturers of spreading material – worldwide – to be able to make available to you the best setting values as quickly as possible. AMAZONE is the name for precise spreading charts, worldwide.

FertiliserService – You can contact us via:

The FertiliserService works across borders, but not only geographically. This is because no matter whether your fertiliser spreader is 1 or 50 years old, we are always by your side with competent and reliable assistance.

Internet: www.amazone.net
 ✉ E-Mail: duengeservice@amazone.de
 ☎ Telephone: +49 (0)5405 501-111
 📞 WhatsApp: +49 (0)175-488 9573



Modern fertiliser spreader testing hall

AMAZONE fertiliser spreaders can be optimally set up using the free **mySpreader App**:



mySpreader App

The all-in-one package for perfect spreader adjustment



EasyCheck is an integral part of the mySpreader App

FertiliserService, EasyCheck & EasyMix

The mySpreader App bundles all the App functions for Amazone fertiliser spreaders into the one App. The intuitive operation and convenient adjustment of the fertiliser spreader lies at the heart of the all-in concept.

FertiliserService

The FertiliserService App conveniently generates precise adjustment recommendations directly in the field, depending on the model of spreader, working width, fertiliser type and application rate. Thanks to the many samples sent in annually by farmers, fertiliser suppliers and fertiliser manufacturers, the App is constantly kept up-to-date so that the end user has access to current information at the start of every season. A special feature of the mySpreader App: the operator can search for fertilisers by entering the fertiliser name, the chemical composition, the granule size or bulk density, for example.

EasyCheck

The second element of the mySpreader App is the digital and mobile EasyCheck test kit. In this test kit, plastic mats are simply placed in the field at defined intervals, spread

over and then photographed. EasyCheck then calculates the degree of coverage of each mat. Based on these values, the App suggests improved settings for the lateral distribution of that fertiliser through the Amazone spreader, allowing the operator to rapidly optimise the accuracy of their crop care.

EasyMix

The mySpreader App is rounded off by the EasyMix App, which works out setting recommendations for blended fertilisers. Different fertilisers are often mixed together to save on the number of applications and so reduce operating costs. This is usually a nutrient-based fertiliser application. However, if the constituents in the blend have different physical properties, precise placement becomes increasingly difficult, especially at increasing working widths. EasyMix determines the best possible compromise between different constituents and suggests the optimal setting values for the ZA-TS and ZG-TS spreaders.

All the settings for the spreader can be transferred from the mySpreader App to the AMAZONE fertiliser spreader via a Bluetooth adapter. This saves time and avoids setting errors, whilst, at the same time, being much more convenient.





Technical data:

ZA-TS	1400	1700	2000	2200	2600	2700	3200	4200	5000	
Working width (m)	15–54									
Hopper capacity (l)	1,400	1,700	2,000	2,200	2,600	2,700	3,200	4,200	5,000	
– with bolt-on extension S 600 (l)	2,000	2,300	2,600	–	–	–	–	–	–	
– with bolt-on extension L 800 (l)	–	–	–	3,000	–	3,500	4,000	–	–	
Payload (kg)	Super frame	3,200	3,200	3,200	3,200	3,200	3,200	3,200	–	–
	Ultra frame	–	–	–	4,500	–	4,500	4,500	4,500	4,500
Filling height (m) without rolling & parking device	1.13	1.23	1.31	1.30	1.49	1.42	1.54	1.76	1.96	
Filling width (m)	2.23	2.23	2.23	2.72	2.23	2.72	2.72	2.72	2.72	
Overall width (m)	2.55	2.55	2.55	2.92	2.55	2.92	2.92	2.92	2.92	
Total length (m) without weighing system	1.48	1.46	1.46	1.55	1.46	1.55	1.55	1.68	1.68	
Drive	mechanical (Tronic) / hydraulic (Hydro)									
Weighing system	as an option with Profis weighing system or ProfisPro including FlowControl torque measurement									
Regulating electronics	ISOBUS communication via AmaTron 4 or any other ISOBUS terminal									
Lower links	Super frame	Cat. II linkage dimensions and fixing pins								
	Ultra frame	Cat. III linkage dimensions, fixing pins Cat II or III								
Tractor valves required	ZA-TS Tronic	Not necessary, (1 d/a valve for hyd. rollover cover)								
	ZA-TS Hydro	1 s/a valve + pressure-free return or load sensing for drive (oil capacity 70 l/min), (1 d/a valve for hyd. rollover cover)								
Min. weight (kg) (with spreading vane set TS 20)	471	480	489	539	528	555	573	685	730	

Illustrations, content and technical data are not binding and may differ depending on the level of equipment. Country-specific road traffic regulations apply and must be complied with, meaning that special approval may be required. The permissible axle loads and total weights of the tractor should be checked. Not all the listed combination options are possible with all tractor manufacturers.

ZA – the spreader



AMAZONEN-WERKE H. DREYER SE & Co. KG

P. O. Box 51 · 49202 Hasbergen-Gaste/Germany · Phone: +49 (0)5405 501-0 · Fax: +49 (0)5405 501-193

AMAZONE LTD

Orchard Farm, Hurst Lane, Auckley, Doncaster, South Yorks., DN9 3NW

Phone: +44 (0)1302 751200 · www.amazone.co.uk · E-Mail: sales@amazone.co.uk